



- Individually adjustable horizontal and vertical blades with 1-1/2" spacing.
- Fully extruded, high quality aluminum blades with semi-airfoil design.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for dimensions over 26" in size.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

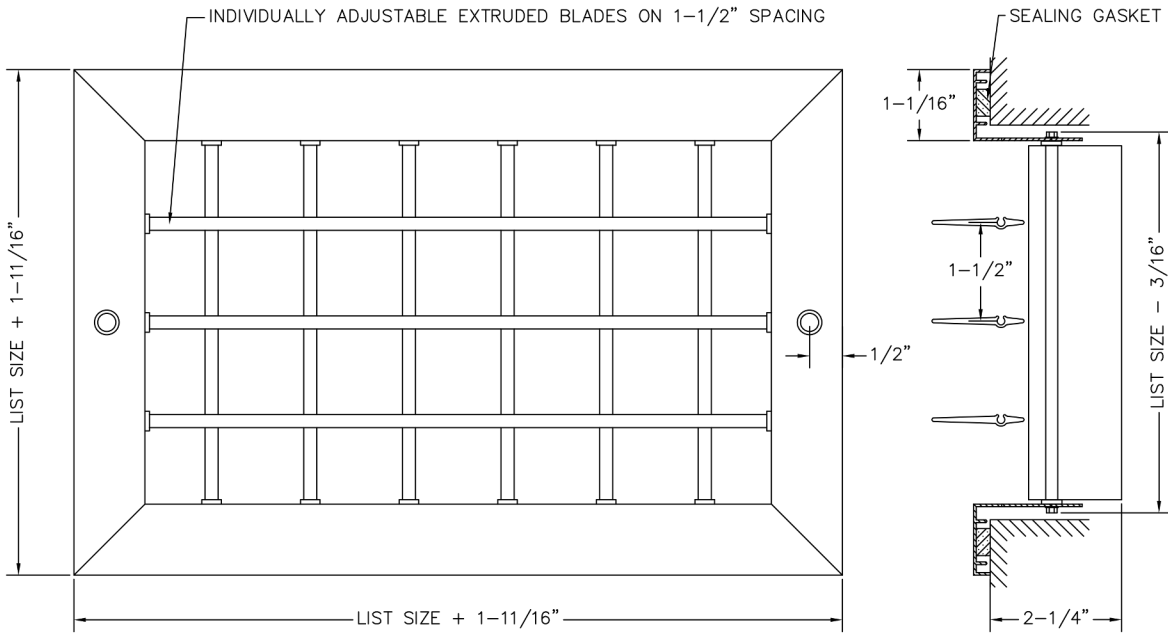

3 DAY SHIP
ANY SIZE. ANY MODEL.
GUARANTEED

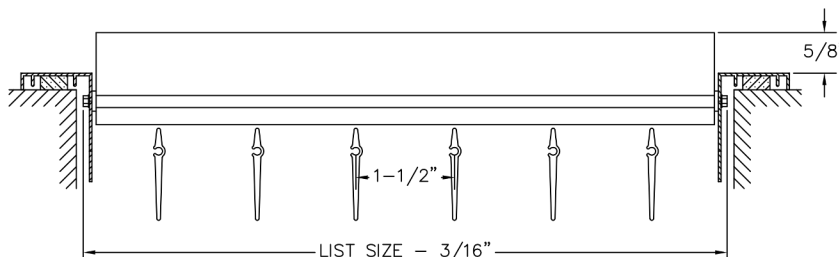

Additional Options

- TB** - No Screw Holes
 - R** - Recessed Blades
 - G** - Gang Operator on Rear Blades
 - R-G** - Recessed Blades & Gang Operator
- on _____ (Front/Back/Both)

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

- W** - White
- S** - Silver
- B** - Brown
- M** - Mill
- FB** - Flat Black
- Special:** _____

3. Select a Lead Time

- 3 Day Ship
- Next Friday
- Standard Delivery

Project / Location: _____

Architect: _____


Engineer: _____

Contractor: _____




OPTIONS


Standard
No additional option

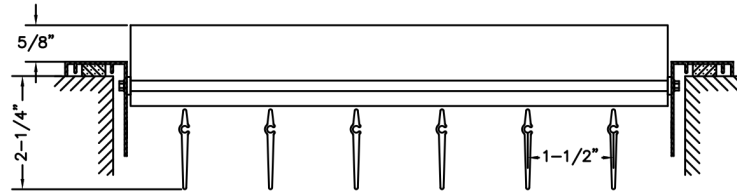

-R
Recessed Blades

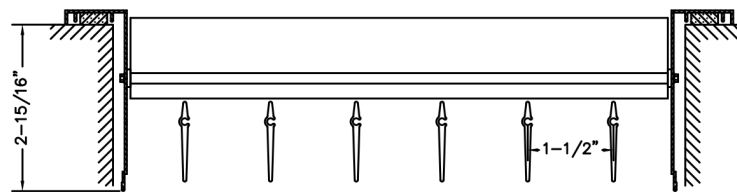


-G
Gang Operator

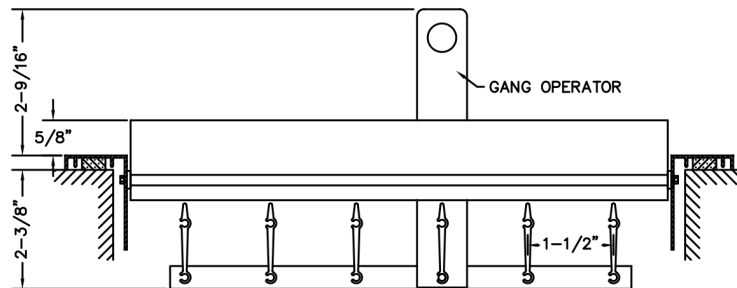

Gang operator can extend up to 2-9/16".
An extra gang operator required every 26" on dimension operator installed on.

-R-G
Recessed Blades
with Gang Operator

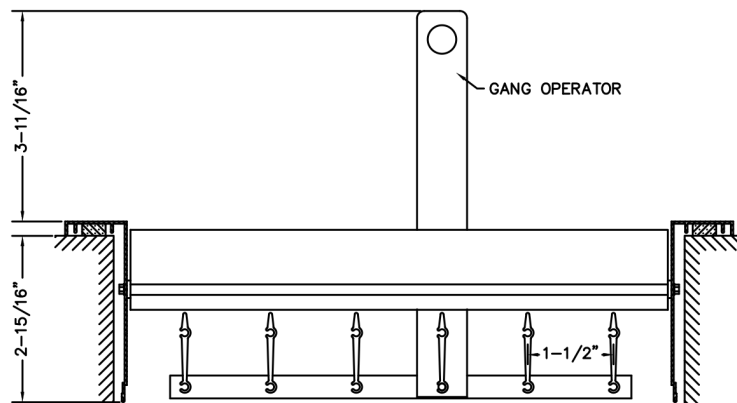

Gang operator can extend up to 3-11/16".
An extra gang operator required every 26" on dimension operator installed on.