




- Individually adjustable horizontal blades with 2/3" spacing.
- Roll-formed aluminum blades with semi-airfoil design.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for sizes over 18" in length.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

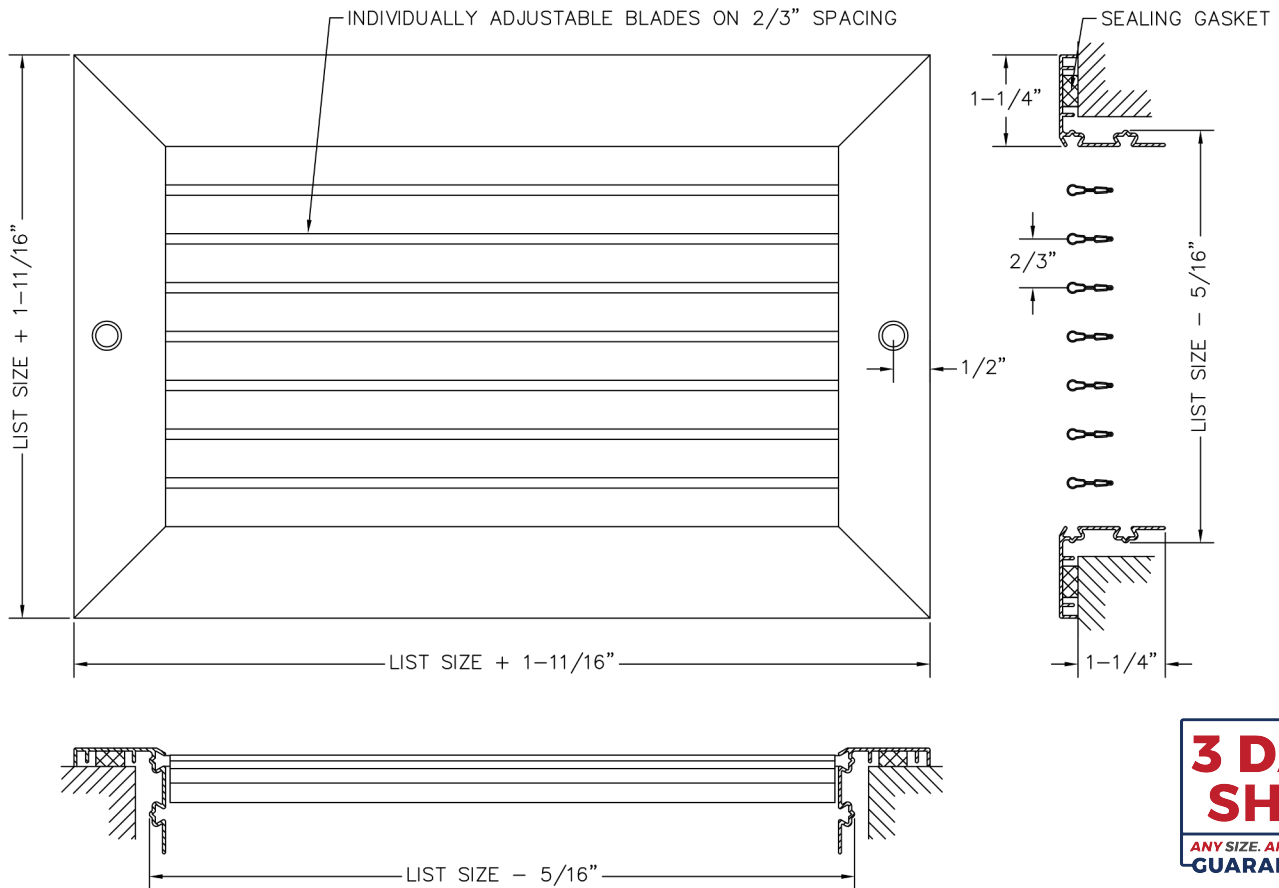

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W - White
S - Silver
M - Mill

3. Select a Lead Time

3 Day Ship
 Next Friday
 Standard Delivery

Additional Options

- D - Opposed Blade Damper
 TB - No Screw Holes
 AA - All Aluminum

Project / Location: _____
 Architect: _____
 Engineer: _____
 Contractor: _____