


- Individually adjustable horizontal front and vertical rear blades with $2/3$ " spacing.
- Roll-formed aluminum blades with semi-airfoil design.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for dimensions over 18" in size.
- Available on 2" increments as standard. Custom sizes available down to $1/16$ " increments.
- Available with durable powder coat finish.

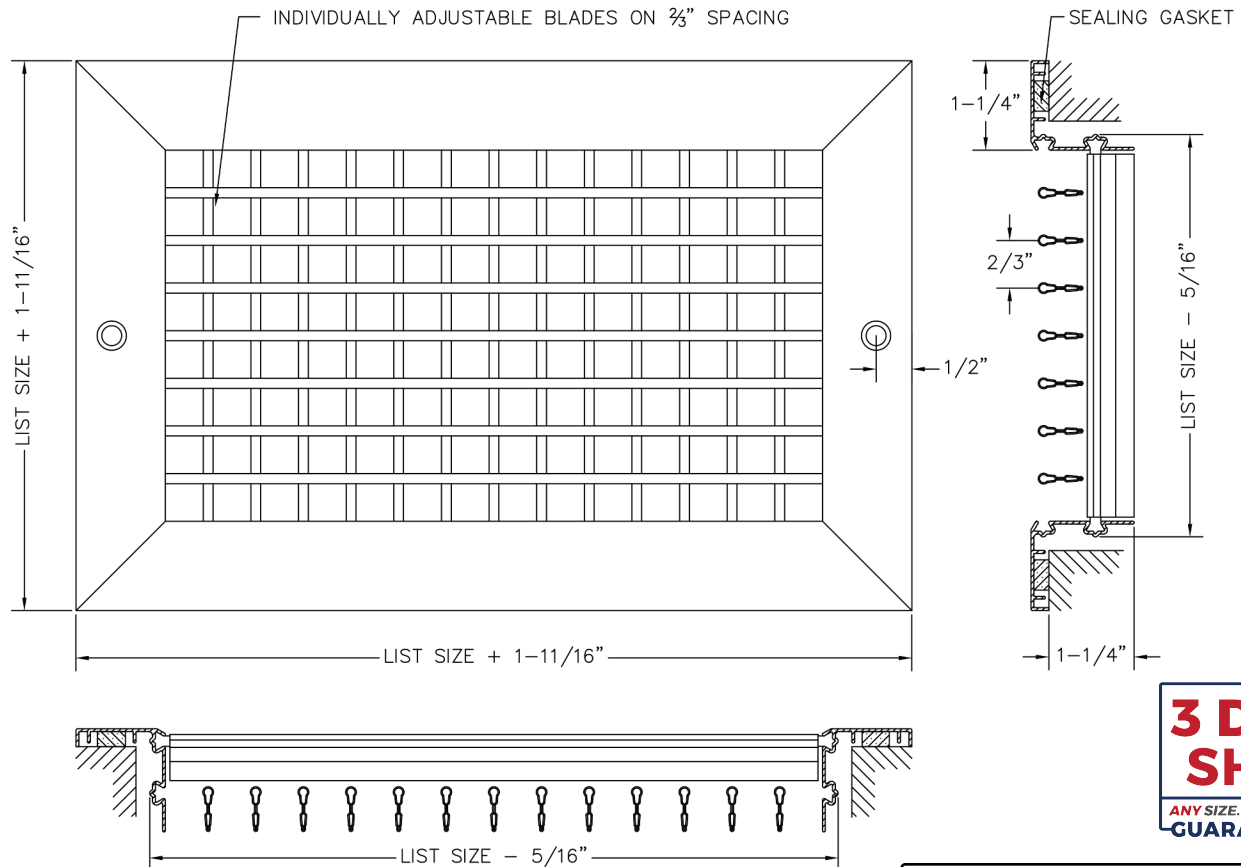

**3 DAY
SHIP**
ANY SIZE. ANY MODEL.
GUARANTEED

1. Specify the Length x Height Dimensions

Inches MM _____ x _____

2. Select a Finish

W White
S Silver
M Mill

3. Select a Lead Time

- ☐ 3 Day Ship
☐ Next Friday
☐ Standard Delivery

Additional Options

- ☐ D - Opposed Blade Damper
☐ TB - No Screw Holes
☐ AA - All Aluminum

Project / Location: _____
Architect: _____
Engineer: _____
Contractor: _____