


- Individually adjustable vertical front and horizontal rear blades with 2/3" spacing.
- Opposed blade damper with slide operator.
- Roll-formed aluminum blades with semi-airfoil design.
- Pressure-fit nylon pivot pins provide rattle free performance.
- High quality aluminum extruded frame.
- Sealing gasket used to prevent streaking on walls or ceiling.
- Countersunk #6 screw hole mounting c/w painted screws.
- Mullions used for dimensions over 18" in size.
- Available on 2" increments as standard. Custom sizes available down to 1/16" increments.
- Available with durable powder coat finish.

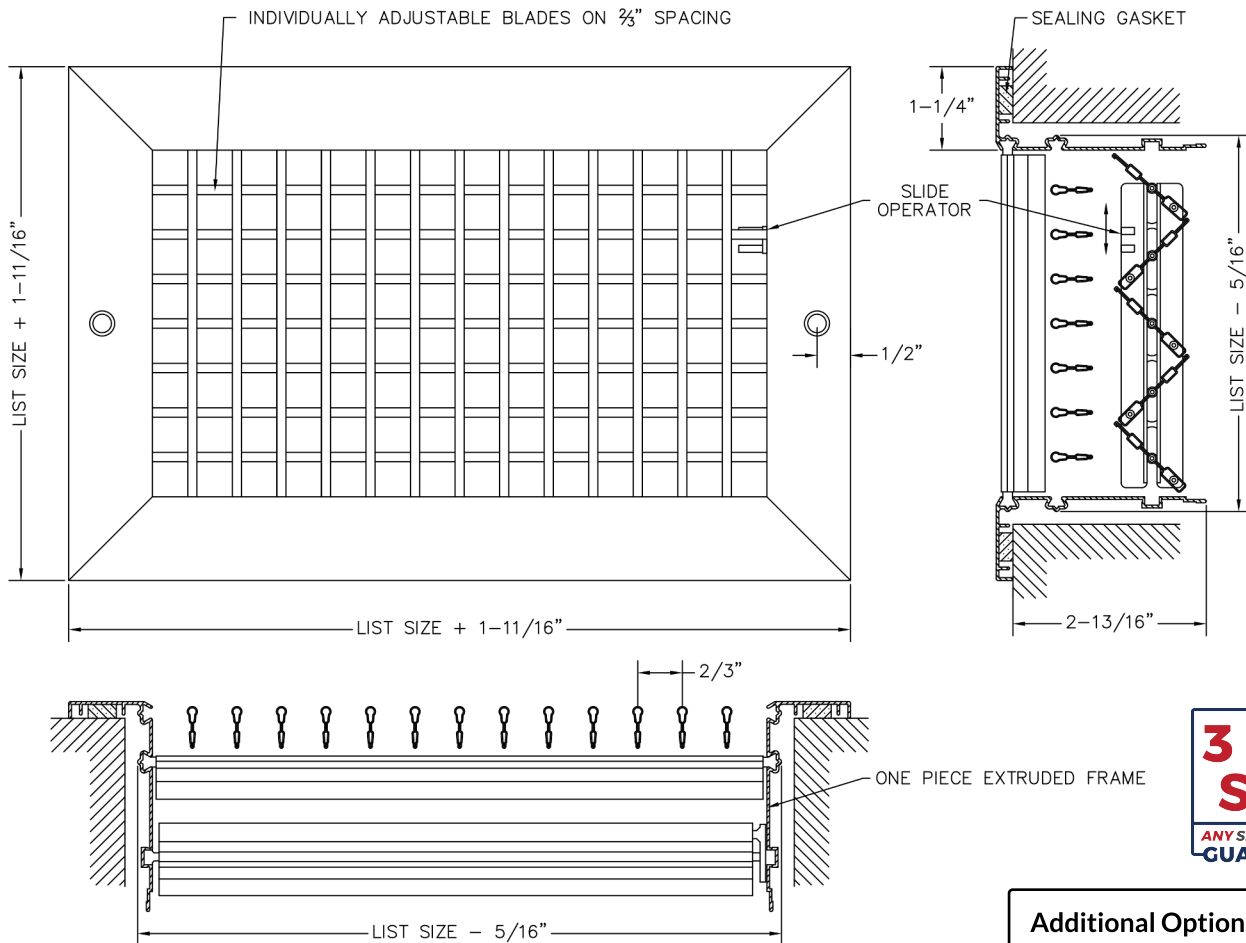

**3 DAY  
SHIP**  
ANY SIZE. ANY MODEL.  
GUARANTEED

### 1. Specify the Length x Height Dimensions

Inches      MM \_\_\_\_\_ x \_\_\_\_\_

### 2. Select a Finish

W White  
S Silver  
M Mill

### 3. Select a Lead Time

☐ 3 Day Ship  
☐ Next Friday  
☐ Standard Delivery

### Additional Options

☐ TB - No Screw Holes  
☐ AA - All Aluminum

Project / Location: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_